

Piezocomposite – bare ring actuator series HPSt without casing

Series HPSt without casing and without preload, diameter 25 – 15 mm, 1000 V

Characteristics:

- max. load: 22000 N
- max. force generation: 13000 N (@ max. voltage)
- free opening
- heat abstraction

Applications:

- laser adjustment
- shock wave generation
- stabilization
- sensor testing
- test and acceleration sensors
- active vibration damping
- as well as all kinds of positioning tasks which require high loads and/or extreme accelerations

Options:

- piezo material HP (high power, higher capacitance)
- low temperature modification
- UHV modification
- SG measurement system



Image: Ring actuators with different dimensions

Standard configuration

		unit		
cable length	without connector	m	0.08	
ceramic		–	HS/HT	HP*
temperature range		°C/°F	to 200/to 390	to 90/to 190

* optional on request

Piezocomposite – bare ring actuator series HPSt without casing


Series HPSt 1000 V, diameter 25 – 15 mm

type	max. stroke* [μm]	length [mm]	capacitance [nF]	stiffness** [N/μm]	resonant frequency [kHz]
HPSt 1000/25–15/7	12/7	9	85	1200	50
HPSt 1000/25–15/20	27/20	18	210	600	35
HPSt 1000/25–15/25	35/25	27	310	400	25
HPSt 1000/25–15/40	55/40	36	420	300	20
HPSt 1000/25–15/60	80/60	54	650	180	15
HPSt 1000/25–15/80	105/80	72	900	130	12
HPSt 1000/25–15/>80	>80	on request			

* Motion at voltage -200 V to 1000/0 V to 1000 V

** Determined with short-circuited actuator respectively connected amplifier.

Drawing:

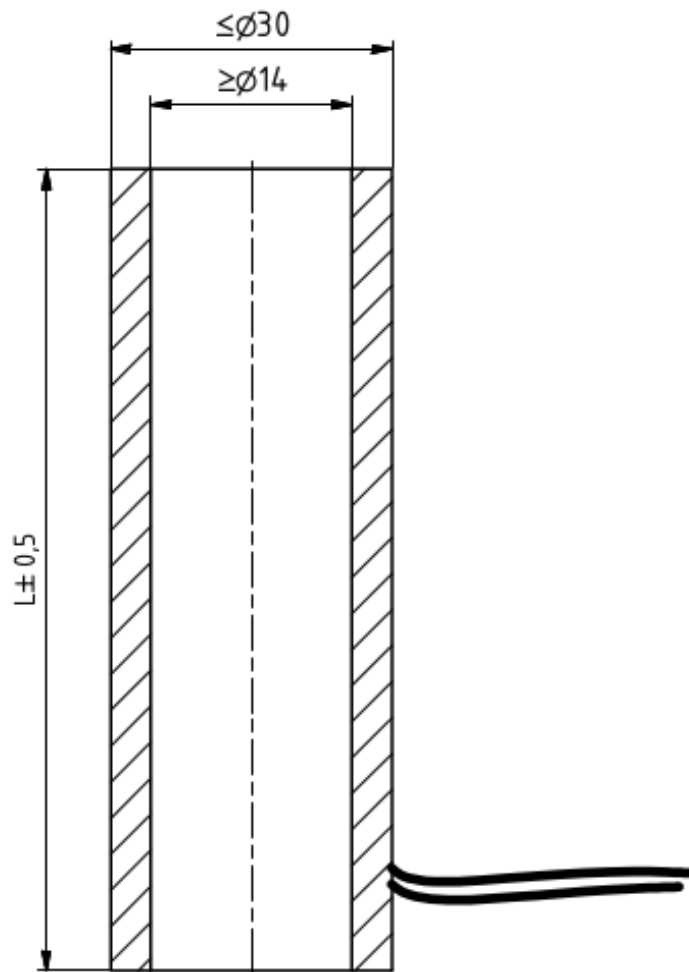

Rights reserved to change specifications as progress occurs without notice!