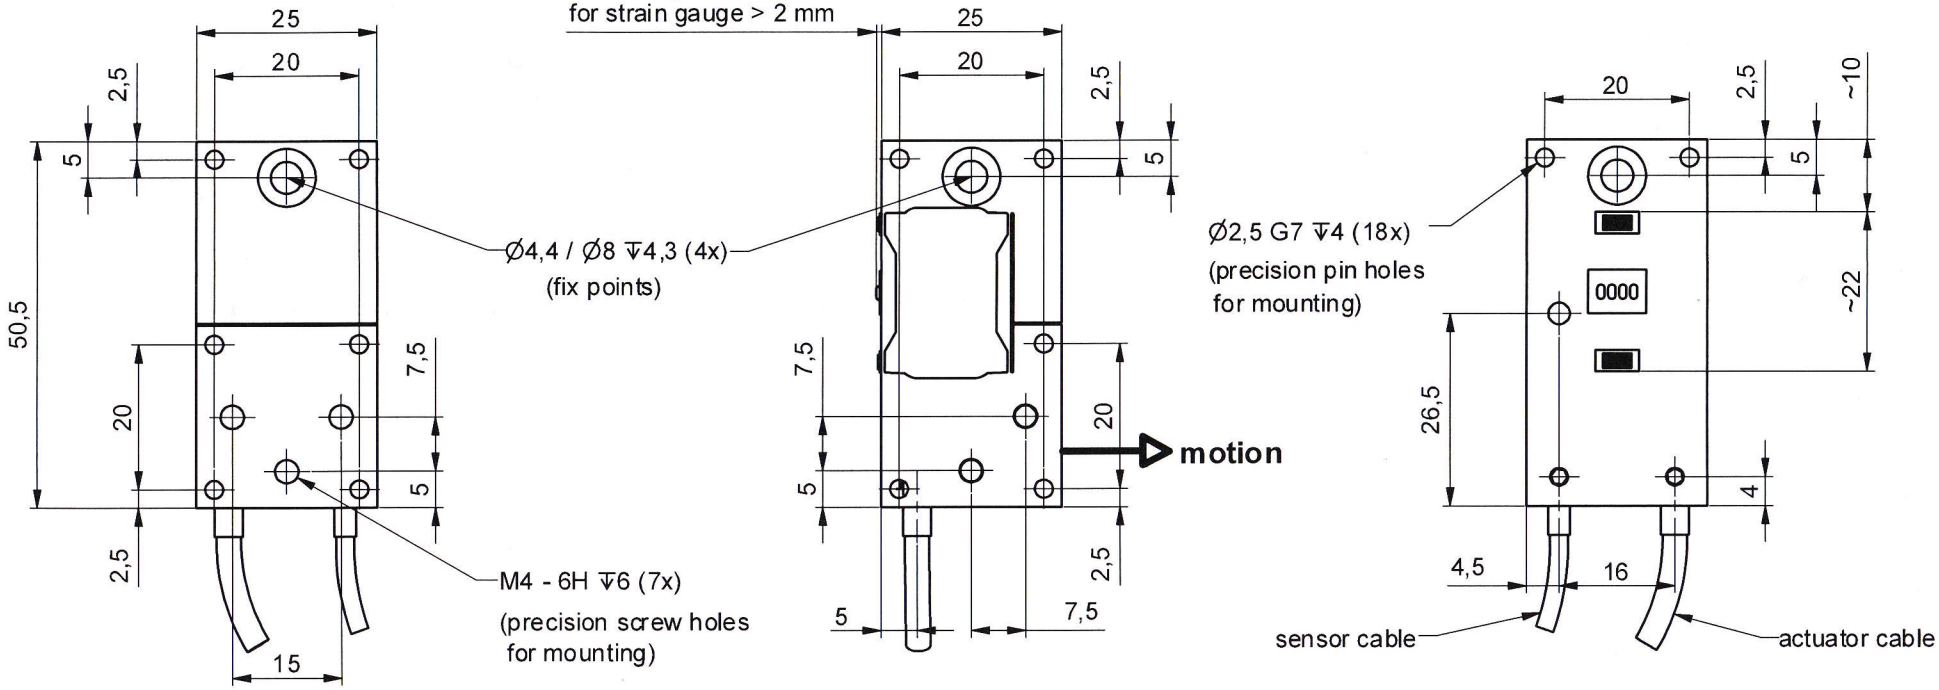

translator can be combined in XY, XZ, and XYZ configurations

please note that there must be a space between the translators and the plate onto which it is fixed, otherwise the movement will be hindered and the actuator can be destroyed

configuration zxy

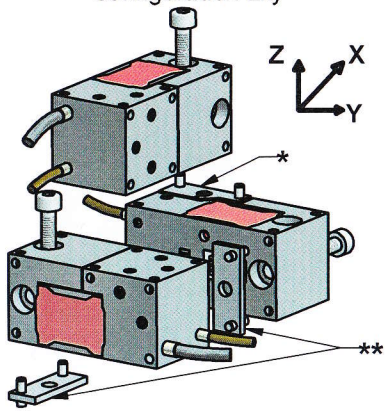

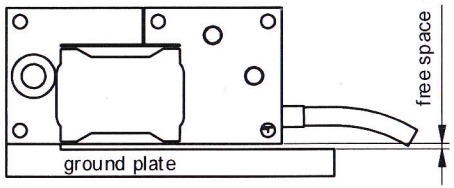

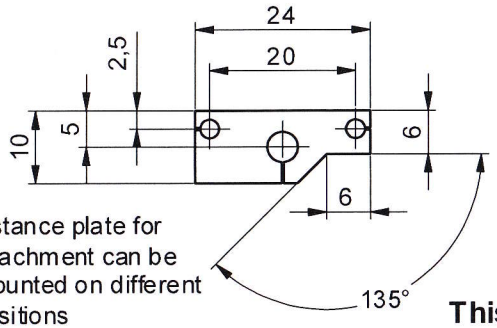

*distance plate for attachment can be mounted on different positions thickness 0.5 mm

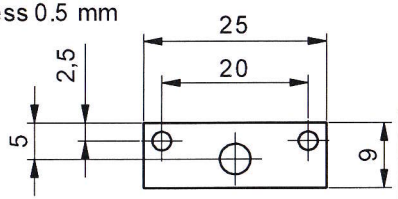

**optional distance plate for mounting on strain gauge side thickness 2 mm on demand

ORIGINAL

This drawing is valid for part-no.:
T-501-01 (E/D) PU 90 SG (EXT./DIG.)
T-502-01 (E/D) PU 100 SG (EXT./DIG.)
T-503-01 (E/D) PU 100 HL SG (EXT./DIG.)

part.-no.		part.-name
T-50x-01(E/D)		PU 90 / 100 (HL) SG
file name	rev.01	OK: date/sign. 31. MAI 2010
PT50x01		
	scale 1:1	customers drawing *piezosystem jena*